

TING-(Fie Pvt Ltd)-[TRIAL 18] - [Results]

**RESULT**

Certificate No. :TRIAL 18

**SELECTED INDENTATION**



Tested for  
Fie Pvt Ltd  
Plot No. 68  
YADRAV-4

Identif  
SP01

Batch  
First

Load  
3000 kgf

Limits  
Maximum  
Minimum

260 HB  
230 HB

Mean Diameter  
3.98 mm



GROUP

Over **60** years of  
consistent excellence

# Multi Axis Computerized Brinell Hardness Testing Machine

Model : Brinmax-3000-V



Wide Testing Range from  
Soft metal to medium hardness Steel



High Accuracy & Repeatability  
of Measurement at all loads



Servo Loading &  
Unloading cycle





Over 60 years of consistent excellence

# Multi Axis Computerized Brinell Hardness Testing Machine Model : Brinmax-3000-V

## Latest GUI Software Features :

- User friendly Software.
- Handled touchscreen HMI Pendant.
- Online indentation setting & focusing on front touch screen display.
- Advance image processing : algorithms implemented for precise calculation of hardness numbers with various options to cover all ranges of specimen.
- Batch files processing : Option for data storage & reports generation.
- Wide options in calibration mode-calibration/verification.
- Extensibility for future advanced image processing analysis requirements.
- USB printer port for printer interface with result & graph print out.
- Facility to measure in manual, semi & automatic mode.
- Facility to export result/data in PDF format.

## Introduction :

FIE Make **BRIN MAX-3000 - V** machine is robust machine which is suitable for use with very large components such as those found in the foundry and oil Industry. It is a simple and accurate machine to produce and automatically measures the indentation to give Brinell hardness number.

This machine is suitable for measuring the hardness of parts up to 4 ton weight with wide testing range from soft to hard with accurate results as per standard.

This testing machine strictly confirms to IS 1500-2, BS: 10003-2 and ASTM-E-10.

## Construction :

**BRIN MAX-3000 - V** machine is fully automatic machine with powered X, Y and Z axis. The Z-axis powered by servo motor. There is fabricated base and casting frame for easy fitment of jobs. X & Y axis are powered by step servo motor. X, Y & Z axis are driven by ball screws & LM guide ways.


Job to be checked is placed on fabricated table and brought in contact with indenter. Load/Unload/Read operations are done automatically. The machine consists of a Brinell test head for applying the test forces of up to 30000N (3000kgf).

Analysis system offers fully automatic Brinell measurements in scales from 250 kgf to 3000 kgf for 5mm and 10 mm dia indentation. The image is digitalized using USB camera fitted on the optical device and is captured by the front touch screen HMI.


The diameters of the indentation are directly measured by software to give Brinell hardness number. The machine is equipped with latest touch screen HMI on support arm system.

## Technical Specifications :


Travel	mm	1000 x 1000 x 1000 (X-Y-Z axis)
Maximum Test Height	mm	1000
Power Input	V (Volt)	440 V AC, 3 ph.
Machine Dimensions	(L x W x H) mm	3000 x 2700 x 3300
Weight (Approx.)	kg.	6000
Magnification of Objectives	X	4X
Measuring Range	mm	1-6
Table Size	mm	1000 x 800
Scale Least Count	mm	0.01
Throat Depth	mm	850

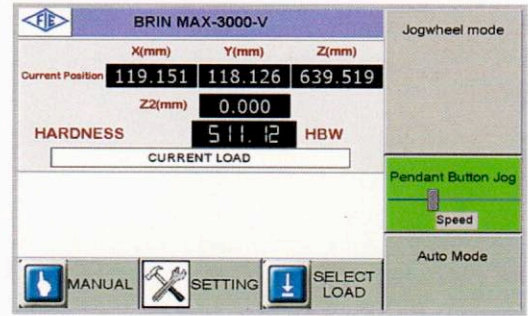

Pendant Home Screen

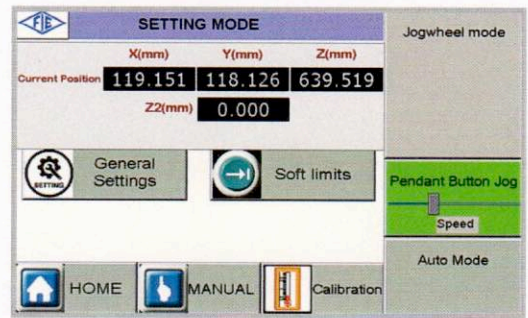

Pendant Setting Screen

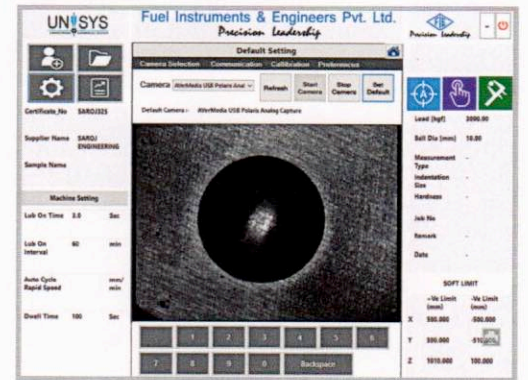

Screen Shot of Software

## Standard Accessories :

Ball holder 5mm	1 No.
Ball holder 10mm	1 No.
Test Block HBW-5/750	1 No.
Test Block HBW-10/3000	1 No.
Allen Spanner	1 Set
Electric Cords	1 Set
USB device for Video	1 No.
Instruction Manual	1 Book



Manufactured By :

## Fuel Instruments & Engineers Pvt. Ltd.

Plot No. 68 & 89, Parvati Co-op Industrial Estate, YADRAV-416 145 (Ichalkaranji),  
Tal : Shirol, Dist : Kolhapur, Maharashtra State, INDIA.

Tel : +91 2322 252137, Cell : +91 98223 94981, E-mail : mrk@fietest.com

Web : www.fiegroup.in, www.fietest.com, www.fuelinstrument.com